


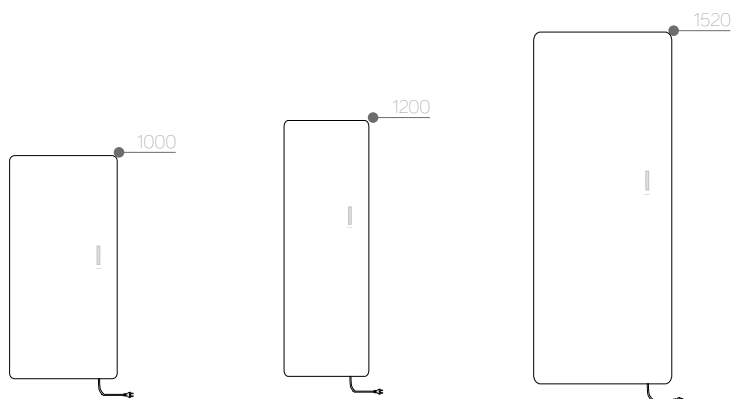


E-Mirror

Technical sheet




-  VERTICAL OR HORIZONTAL INSTALLATION
-  ELECTRIC
-  TOUCH SCREEN



ErP **CE**

Material	Tempered glass 4+4 mm
Wall fixings	4 (anti-release system)
Power source	230V
Wire	Wire with schuko plug; approximate length 1300 mm
Protection rate	IP45
Electrical insulation	Class 2
Glass finish	white - black - mirror
Packaging	carton box + styrofoam protections

Standard equipment: 1 wall fixing kit - 1 infrared remote control

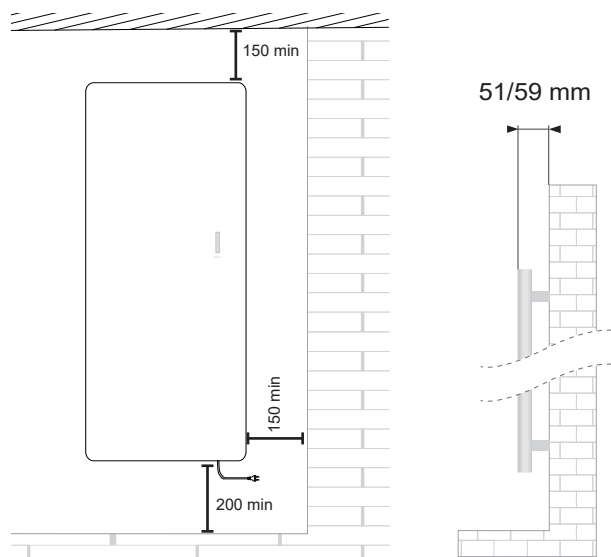

White tempered glass

code	height (mm)	width (mm)	weight (kg)	heating element (watt)	heating element btu
389299	1000	500	11,0	700	2388
389296	1200	400	11,0	500	1706
389302	1520	600	19,2	1500	5118

Black tempered glass


code	height (mm)	width (mm)	weight (kg)	heating element (watt)	heating element btu
389300	1000	500	11,0	700	2388
389297	1200	400	11,0	500	1706
389303	1520	600	19,2	1500	5118

Mirror

code	height (mm)	width (mm)	weight (kg)	heating element (watt)	heating element btu
389301	1000	500	11,0	700	2388
389298	1200	400	11,0	500	1706
389304	1520	600	19,2	1500	5118

For values in kcal/h = watt x 0,85984.

MAIN FUNCTIONS OF THE TOUCH SCREEN

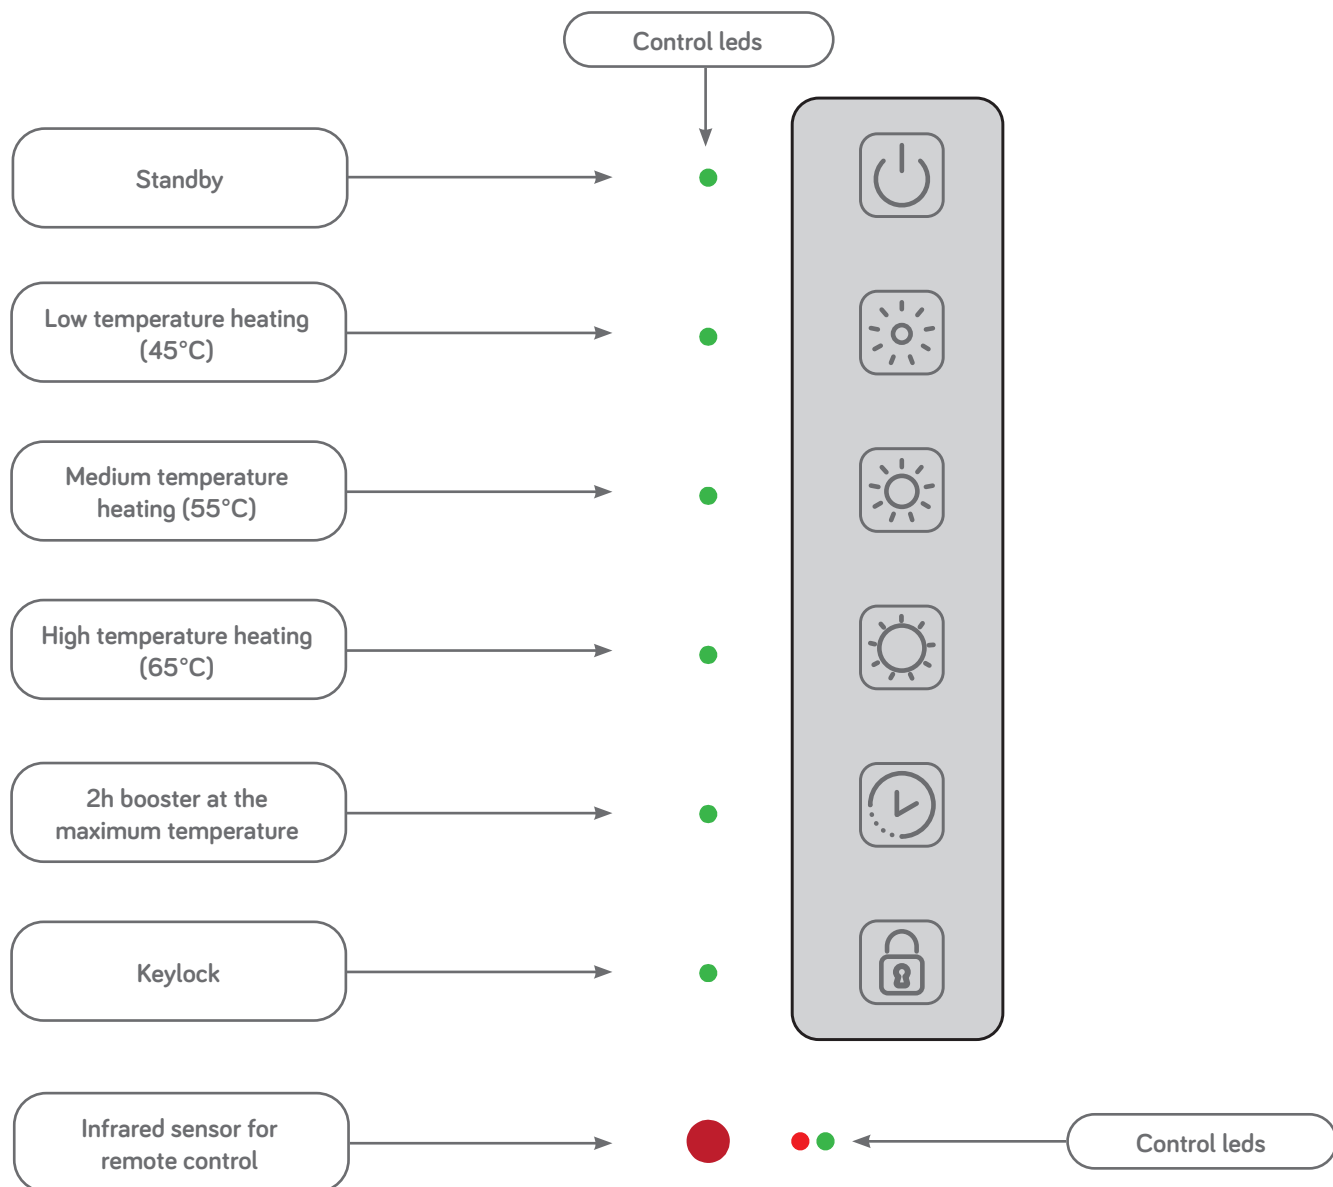

MAIN FUNCTIONS OF THE REMOTE CONTROL (INCLUDED)

	Comfort	The thermostat keeps the room at the temperature set by the user;
	Chrono	Daily programming with weekly repetition;
	Keylock	The keys of the device are blocked;
	Night	Room temperature is maintained lower than the «Comfort» temperature set by the user;
	Antifreeze	The thermostat maintains a room temperature always over 7°C;
“2h”	2h Booster	Operation at maximum power for 2 hours regardless of the temperature set;
	Open window detections	When a window is opened, the thermostat switches off for max. 30 minutes;
ECO	ECO mode	Reduction of energy consumption;